STEEL COVER ~460 LBS

BODY ~9,550 LBS


BASE SLAB ~3,125 LBS

3'-0" X 5'-0" HS-20 STEEL DOOR

PAINTED BLACK | DIAMOND PLATE FINISH

Precast Concrete 4'-0" X 8'-0" X 4'-0" **Communication Splice Box**



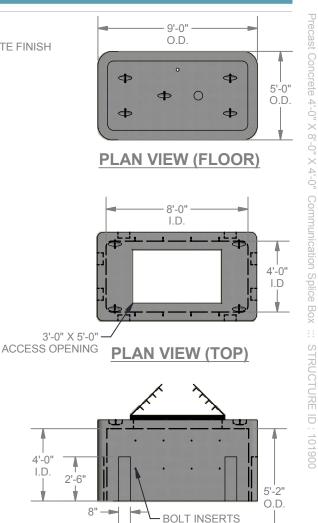

FOR RACKING

THE THE PERSON OF THE PERSON O **ELEV. VIEW**

STANDARD SPLICE BOX FEATURES

PULL IRONS

SUMP RECESS

- Designed for HS-20 Loading

THINWALL KNOCKOUTS

- Thin Wall Knockouts for Easy Cable Splicing (shown)
- Pull Irons Cast In Floor (shown)
- 6" Ø Sump Recess in Floor (shown)
- 2" Ø Ground Hole in Floor (shown)
- Black Painted Steel Cover (shown)
- Diamond Plate Finish on Cover (shown)
- Smooth Corners for Safe Installation & Quality &...It Just Looks Better!

SPLICE BOX OPTIONS

- Unistrut Cast Into Wall for Racking in lieu of Bolt Inserts
- Terminators Cast Into Wall in lieu of Thin Wall Recess
- Non-Metallic Racking

4'-0" ΙD

- Plastic Coated Racking
- Cast In Grounding Lug
- Pull Irons Add or Change Locations
- Hot Dipped Galvanized in lieu of Black Painted Steel Door
- Aluminum Lld in lieu of Black Painted Steel Door
- Divider Plate for Multi-Purpose Boxes



PROUDLY BASED IN HOUSTON, TEXAS

T: 832-804-7062

F: 832-804-7071

E: info@lockesolutions.com

LOCKESOLUTIONS.COM